

Install.
Care.
Preserve.

EXPERIENCE FLOORS!



SOLID WOOD

Installation instructions

INSTALLATION

CLIPPING AND GLUE SYSTEM – FAST AND EASY

Some woods are installed only with glue, the choice for the same depends on the type of wood as well as width of the plank.

This method is:

- Very guick, easy and convenient to install.
- The boards easily lock with each other horizontally with no gaps.

NAIL DOWN METHOD

The nail down system makes it easy to install a genuine wood floor. With adhesive and nails, we bind the floor together so that it expands together and not individually and there is no surface expansion.

- Nail down the product through the tongue on marine ply.
- The expansion is uniform as per the nail down system.
- The boards allow optimal expansion and contraction of the product.









WHAT IS SOLID WOOD

Solid Wood represents a homogenous construction of wood. The product expands 30% more than engineered wood and therefore it is seasoned well to allow for such expansion. Solid wood flooring comes pre-finished. The product comes with seven coats of formaldehyde-free acrylic lacquer which is UV-cured so that the product does not get dusty or stain and scratch easily.






SOLID WOOD

Maintenance instructions

MAINTAINING YOUR FLOOR

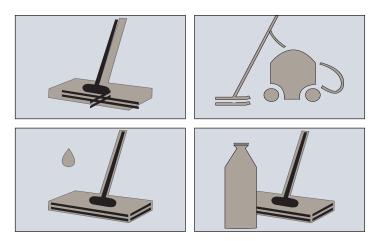

A clean floor simply needs to be vacuumed, dry mopped or swept. For more thorough cleaning, mop the floor using a well wrung out cloth and water plus a few drops of a general cleaning agent. Avoid wet mopping or using too much water on the wood.

REMOVING STAINS

Prefinished wood floors are very resistant to stains. The general rule is to remove stains as quickly as possible, before they dry and set. Afterwards, wipe clean with a well wrung—out cloth. Consult the stain guide for the type of cleaner you should use.

Stain:	Removed by:
Fruit, berries, juice, soft drinks, beer, wine, milk, cream, coffee, tea	Mild ammonia–free synthetic detergent and lukewarm water
Chocolate, grease, whipped cream, rubber marks, oil, tar, asphalt	Detergent solution
Ink, felt tip pens, stencils, blacking, paint, crayons, etc	Denatured alcohol
Urine, vomiting	Mild ammonia–free synthetic detergent and lukewarm water
Blood	Cold water

FINISHES

OIL

The choice between an oiled floor or a lacquered floor is entirely a matter of choice. We use 7 coats of formaldehyde free oil for our floors.

LACQUER

Lacquer is the most commonly used surface treatment. We use 7 coats of UV curved formaldehyde free lacquer for our floors.

For an assured response time of 48 hours

call our toll-free no. 1800 226 211 or email at sales@squarefoot.co.in

Head Office:

Classic Floorings & Interiors (P) Ltd.
Ground Floor, Raghuvanshi Mansion
Raghuvanshi Mills Compound
9-11, Senapati Bapat Marg, Lower Parel
Mumbai - 400 013
T: +9122 4047 6211

W: www.squarefoot.co.in www.sportssurfaces.co.in

Company Stores:

Bengaluru +9180 4110 1012 Chennai +9144 4550 8411 Goa +9183 2651 1422 Hyderabad +9140 4003 7212 Kochi +9148 4402 3972 Kolkata +9133 3042 4243 New Delhi +9111 2601 7049 Pune +9120 4129 4021

Area Representatives:

Ahmedabad +91 78782 10126 Coimbatore +91 90032 56718 Thiruvananthapuram +91 93882 15972 Visakhapatnam +91 95336 61616

Institutional Sales: projects@squarefoot.co.in

